

## Indoor Panel Antenna 698-2700 MHz

**Product Description**

This panel antenna is specifically designed for broadband in-building distribution of LTE/CDMA800/GSM900/GSM1800/3G and WLAN services. The antenna is constructed from lightweight materials suitable for wall mounting. The off-white radome blends easily into most building aesthetics.



Indoor Panel Antenna

**Features/Benefits**

- LTE ready ( 700MHz and 2600MHz bands )
- Broadband, coverage 698 to 2700MHz
- UV stable ABS radome
- Aesthetically designed, compact and light weight
- Low VSWR, High gain, Stable performance
- NF connector with pigtail

**Technical Specifications**

Product Type	Panel Antenna
Application	Indoor
Frequency Range, MHz	698-960 / 1710-2700
Number of Input Ports	1
Connectors	N female
Impedance, Ohm	50
VSWR (50 Ohm)	2.0 @ 698-960MHz 1.5 @ 1710-2700MHz
Total Input Power, W	max. 50
Gain, dBi	7.0 @ 698 - 960MHz 10.0 @ 1710 - 2700MHz
Front-to-Back Ratio, dB	7.0 @ 698-960MHz 10.0 @ 1710-2700MHz
Polarization	Vertical
Horizontal Beamwidth, deg	70 @ 698-960MHz 60 @ 1710-2700MHz
Vertical Beamwidth, deg	55 @ 698-960MHz 45 @ 1710-2700MHz
Connector Cable, mm (in)	150 (5.90)
Radome Material	ABS
Radome Color	White
Mounting Hardware included	Wall bracket, screws
Temperature Range, °C (°F)	-40 to +60 (-40 to 140)
Height, mm (in)	44 (1.73)
Width, mm (in)	180 (7.09)
Length, mm (in)	210 (8.27)
Weight, kg (lb)	0.4 (0.89)
Environmental Class	Indoor

**Notes****Other Documentation**





Indoor Panel Antenna 698-2700 MHz

Horizontal

880MHz



2500MHz




Vertical

880MHz

2500MHz



Installation Sketch

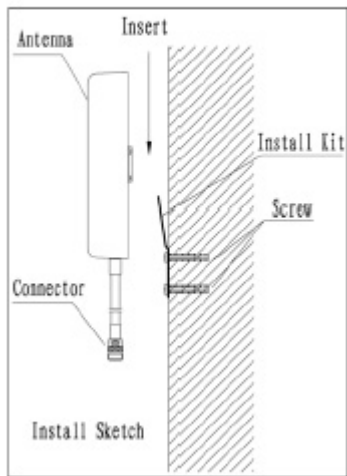

All information contained in the present datasheet is subject to confirmation at time of ordering